



Series	5000	Warranty	5 Years
Volts	12	BCI	SPEC
Cells	6	Plates/Cell	11
Terminal Type	Flag L		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	19" 4/0 interconnect cables *RE incl.		

### Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	45 A
Maximum Charge Current (String)	70 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	871
Marine Crank Amps (MCA) 32°F / 0°C	1088
Reserve Capacity (RC @ 25A)	891 Minutes
Reserve Capacity (RC @ 75A)	297 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>479 AH</b>	<b>4.79 A</b>
@ 72 Hour Rate	<b>453 AH</b>	<b>6.29 A</b>
@ 50 Hour Rate	<b>429 AH</b>	<b>8.58 A</b>
@ 20 Hour Rate	<b>371 AH</b>	<b>18.56 A</b>
@ 15 Hour Rate	<b>345 AH</b>	<b>23.02 A</b>
@ 10 Hour Rate	<b>330 AH</b>	<b>33.04 A</b>
@ 8 Hour Rate	<b>319 AH</b>	<b>39.91 A</b>
@ 5 Hour Rate	<b>297 AH</b>	<b>59.40 A</b>
@ 1 Hour Rate	<b>167 AH</b>	<b>167.08 A</b>

Amphere hour capacity ratings based on specific gravity of 1.280 at 25°C (77°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	123 kg	271 lbs
Length	55.9 cm	22"
Width	28.6 cm	11.25"
Height Inc. Term.	46.4 cm	18.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polypropylene	
Cover (Outer)	High Density Polypropylene snap fit to outer container	
Handles	Molded	

### Cycle Life vs. Depth of Discharge

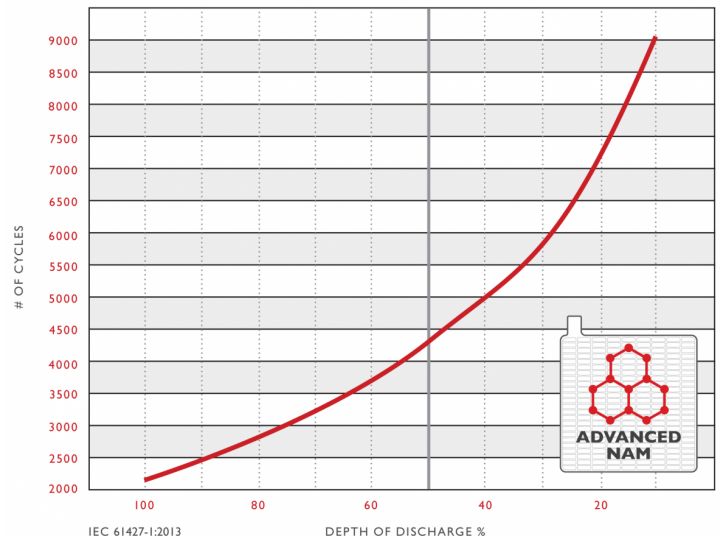

### Voltage vs. Depth of Discharge

