



PC1700LMJT GROUP 65 SPECIFICATIONS



BATTERY DESIGN

- Absorbent glass mat (AGM) technology
- 12V battery pure lead VRLA
- SAE Group 65 footprint
- Rugged construction
- Brass SAE terminal
- Can be mounted in any orientation except inverted
- Rope lifting handle
- US DOT and IATA certified non-spillable
- Shipped fully charged - just install and go!
- Container and cover made from oil resistant plastic
- Metal jacket


PERFORMANCE FEATURES

- PHCA: 1,700A at 27°C (80°F); for 5 seconds
- CCA: 875A at -18°C (0°F)
- CA/MCA: 1,175A at 0°C (32°F)
- HCA: 1,325A at 27°C (80°F)
- Reserve capacity: 142 minutes
- Short circuit current: 3,000A
- Deep cycling capability: 400 at 80% DOD
- Design life: 12 years
- Typical service life: 6 to 8 years
- Operation temperature range: -40°C (-40°F) to 80°C (176°F)

PHYSICAL CHARACTERISTICS

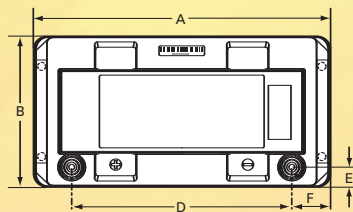


SAE TERMINALS



Dimensions: mm (Inches)

Nominal Dimensions, mm (in.)							Weight
A	B	C	D	E	F	G	
328.7 (12.94)	166.1 (6.54)	191.3 (7.53)	246.1 (9.69)	20.8 (0.82)	41.4 (1.63)	25.4 (1.00)	27.6 kg (60.9lbs)

Dimensions ± 0.533mm (± 0.021 in.)

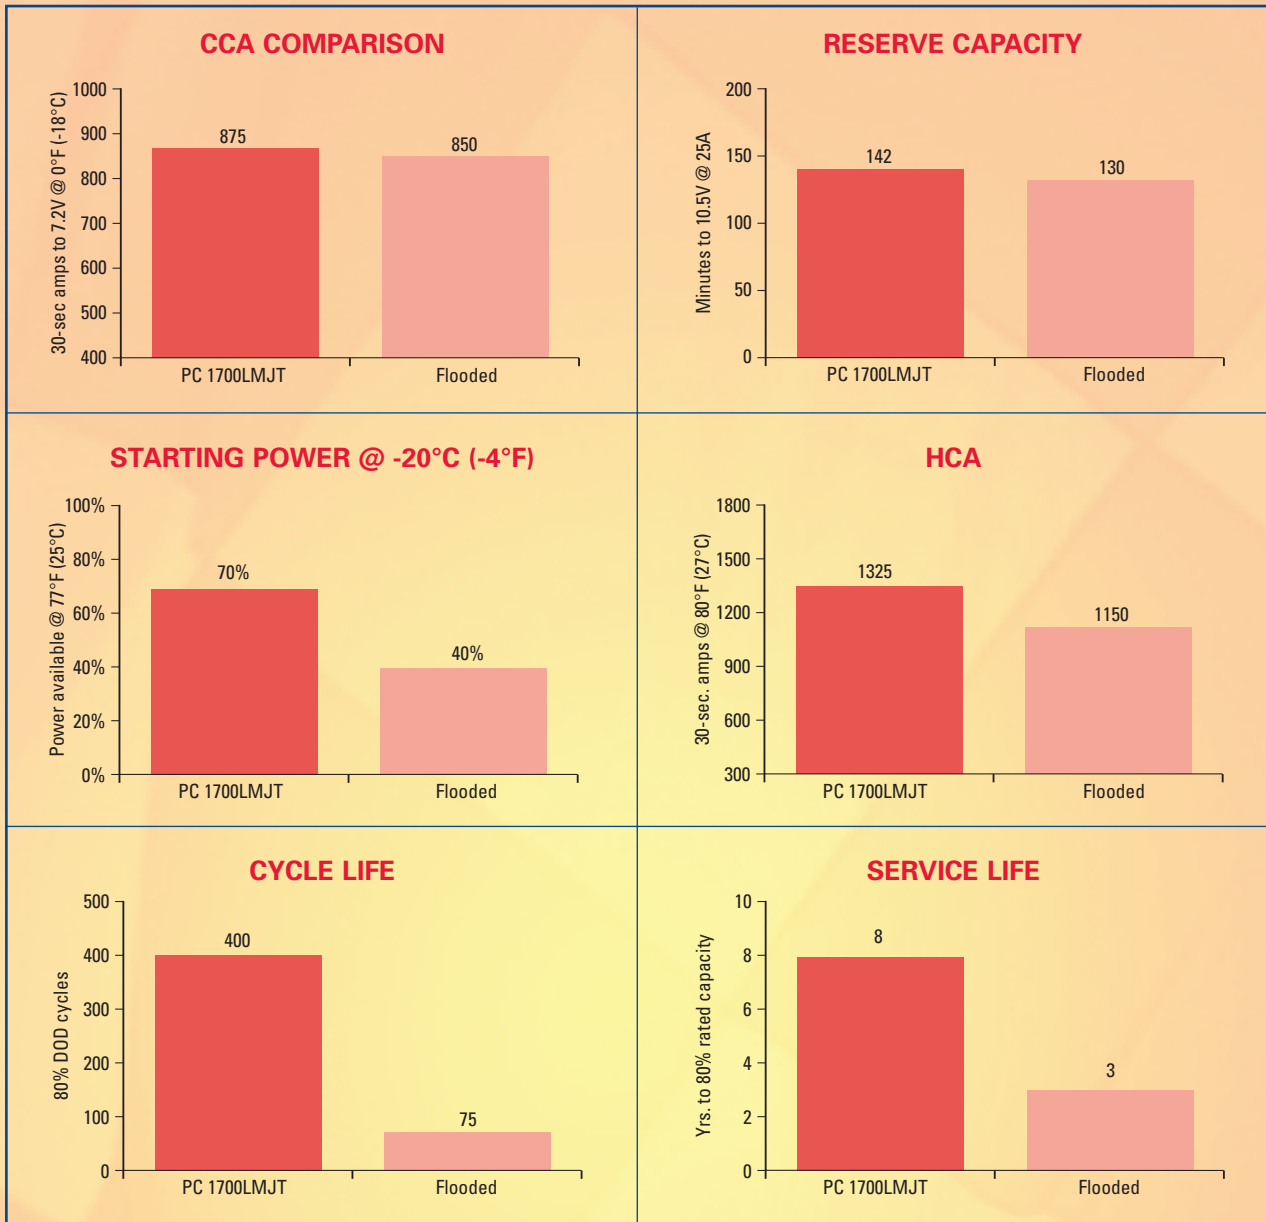

HIGH RATE DISCHARGE AT 25°C (77°F)

5 sec.	10 sec.	15 sec.	20 Sec.
1,700A	1,540A	1,400A	1,355A

EXTENDED DISCHARGE AT 25°C (77°F) TO 10.02V

5 min	15 min	1 hr	3 hr	5 hr	10hr	20hr
337.6A	163.8A	53.6A	19.9A	12.4A	6.5A	3.4A



Regional Sales

EnerSys Limited
 Rake Lane,
 Clifton Junction,
 Manchester M27 8LR UK
 Email: odyssey.sales@uk.enersys.com
 Tel: +44 (0)161 727 3952
 Fax: +44 (0)161 727 3805

EnerSys Energy Products Inc.
 617 North Ridgeview Drive,
 Warrensburg,
 MO 64093-9301, USA
 Tel: +1-660-429-2165
 Fax: +1-660-429-1758

EnerSys Australia Pty Ltd
 7 Walker Place,
 Wetherill Park, NSW,
 Australia 2164
 Tel: + 61 (0) 29756 1870
 Fax: + 61 (0) 29757 4537
 Toll-free: 1-800-550-153

Distributed by:

Website: www.odysseyfactory.com

© 2005 EnerSys. All rights reserved.
 Trademarks and logos are the property of
 EnerSys and its affiliates unless otherwise noted.