



Yuasa Technical Data Sheet

Yuasa YBX1618 - Super Heavy Duty Battery

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 110Ah |
| Cold Cranking Amps (EN1) | 680A |

Dimensions

| | |
|--------|-------|
| Length | 407mm |
| Width | 176mm |
| Height | 234mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 29.6kg |
|-----------------------|--------|



Container Features

| | |
|-------------|-------------|
| Case Type | E41 JIS |
| Cell Layout | 1 |
| Hold Down | N |
| Handles | ✓ |
| Lid Type | Raised Plug |


Technology

| | |
|-------------------------|-------------|
| Technology | Sb/Ca |
| Recommended Charge Rate | 5A |
| Performance Marking | W2-C2-V2-E1 |


Terminal Type

T1


Standard DIN Post



Positive Terminal



Negative Terminal

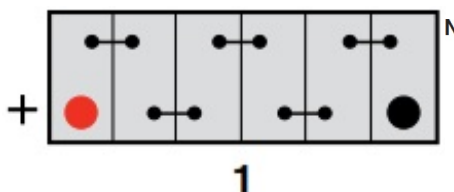

Battery Hold-down



Data Sheet generated on 28/04/2020 - E&OE